


Nexa is the interface; ECAP coordinates the work

The current ECAP application uses a React/Vite frontend served through Cloudflare Pages. Pages Functions handle edge routes and configured backend integrations. The earlier Issistant demonstrator and product-design brief are historical design inputs, not the deployed runtime specification.

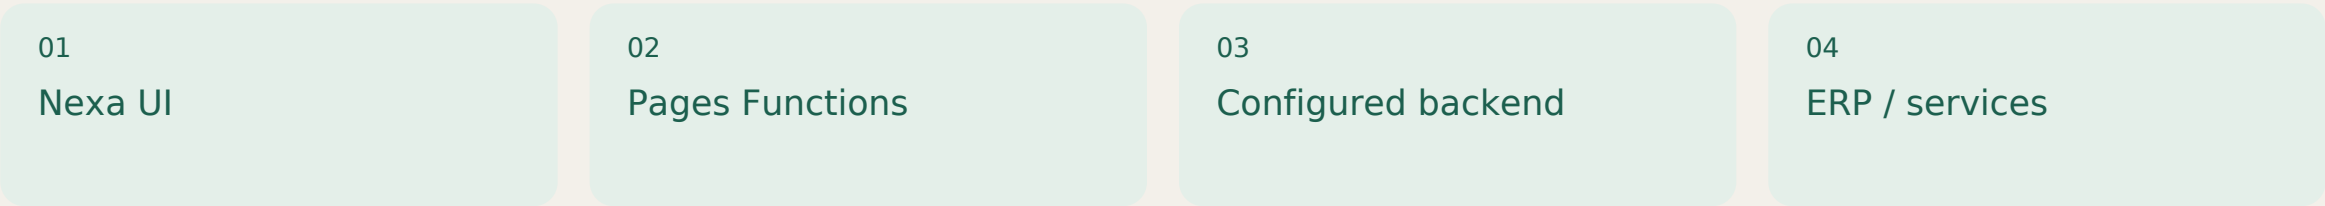

Frontend

Forms, navigation, previews, contextual Help and AI-assisted interaction.

Backend boundary

Authorization, validation, durable state and governed external execution belong on the server.

Data follows company and environment

Carry the authorized company and release lane through reads, edits, linked records, messages and connector calls. Do not infer authorization from a visible link or client-side role alone.

Scoped records

Keep source documents, extracted values, approval history and sync results attached to the correct records.

Storage


Existing services use their configured storage; do not replace unavailable data with invented success or sample records.

Isolation

Avoid cross-environment credential or data fallback. Verify deployment isolation before making availability claims.

Keep financial execution behind explicit controls

For A/P, approval and posting are separate transitions. Server validation, permissions, decision history and connector results determine the outcome.

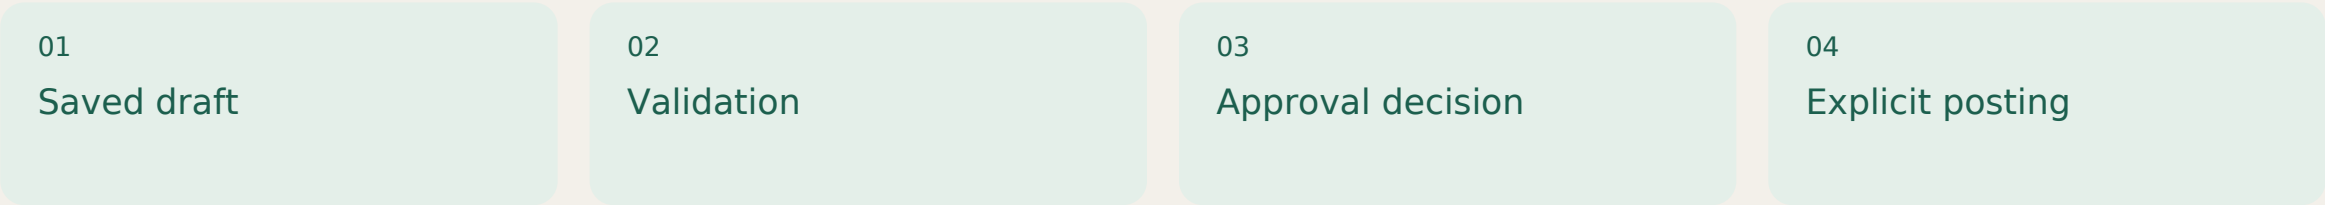

SAP Business One

Use the configured Service Layer connection and company context. Handle actual error responses and ambiguous outcomes carefully.

Retry control

Check existing ERP references/results before retrying. Never fabricate a posting ID or assume HTTP success means business success.


Ground AI in the available evidence

Nexa can help find records, summarize the current context and suggest next actions. A useful answer identifies its source and limitations; connector failures remain visible.

Inputs	Controls	Outputs
Authorized record data, company configuration and relevant supporting documents.	Preserve permissions, approval rules and explicit financial writes.	Explain recommendations and allow the user to inspect the supporting record.

Release through the controlled environments

The active GitHub repository is David-at-GitHub/ECAP. Main builds through Cloudflare to Dev. Dev-to-Test and Test-to-Prod promotion remain owner-controlled; a query parameter alone is not proof of independent deployment.

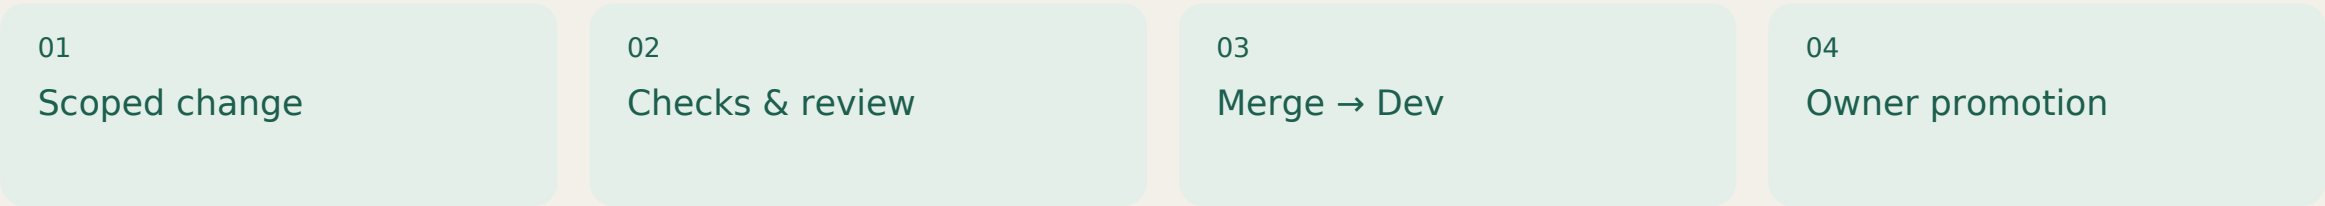

Evidence

Tie deployment proof to the exact merged commit and test the affected live behavior.

Availability

Preserve sessions and approved releases. Planned downtime requires explicit prior approval and an agreed window.

Maintain documentation with the product

These public walkthroughs and guide PDFs share a dated content source. In-app ? → Docs supplies the form-specific procedures. Public resources must load without a business-data session or a live ERP connection.

Embedded resources

Serve the bundled Learn documents directly; avoid page-to-page redirect loops and nested application shells.

Supportable links

Keep legacy aliases, direct-open actions and real PDF downloads available.

Verification

Check resource type, content revision, playback, keyboard operation and narrow layouts; record any unverified device behavior.